



Disjoncteurs Ph/n

Vis/Automatique



4500 A

- Protection magnétothermique
- Bornes décalées 10 mm²
- In de 2 à 32 A
- Un 230 V~ 50/60 Hz
- Pdc 4500A sous NF EN 60898-1
- Classe 3
- Courbe de déclenchement C et D




fiche technique

	RACCORD À VIS		RACCORD AUTOMATIQUE	MODULE	EMBALLAGE
	COURBE C	COURBE D	COURBE C		
2 A	01002	-	01302	1	12
3 A	01003	-	-	1	12
4 A	01004	-	-	1	12
6 A	01006	-	01306	1	12
10 A	01010	01210	01310	1	12
16 A	01016	01216	01316	1	12
20 A	01020	01220	01320	1	12
32 A	01032	01232	-	1	12

accessoires



06010

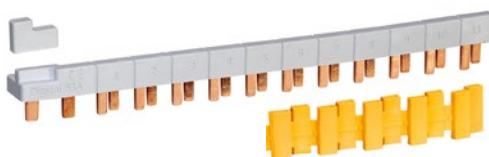

06016

06002



06018

RÉFÉRENCE	DESCRIPTION	NOMBRE DE MODULES	EMBALLAGE
06018	Kit d'alimentation ID2/5DPN	7	1
06016	Kit d'alimentation ID2/11DPN + cache dents	13	1
06012	Peigne réversible Ph ou N 63 A	13	1
06014	Peigne réversible Ph ou N 63 A 1 mètre	54	1
06010	Connecteur 25 mm ²	-	20
06002	Cache dents Ph+N - 5 modules	5	1